


TraceGOLD TG-WaxMS GC Columns

Manufactured for better column-to-column reproducibility

- Polar phase, polyethylene glycol
- Polar-deactivated surface tightly binds polymer for excellent thermal stability
- Resists oxidative damage, damage from strongly acidic or basic volatiles better than silicone solid phases

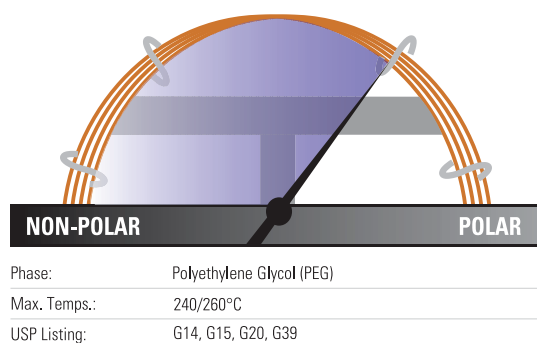

TraceGOLD TG-WaxMS GC Columns

ID (mm)	Length (m)	Film Thickness (µm)	Cat. No.	Quantity	
0.0	10	0.1	26088-0200	1 Each	
0.15	10	0.15	26088-2750	1 Each	
		0.15	26088-2760	1 Each	
		0.15	26088-2940	1 Each	
0.18	20	0.18	26088-5780	1 Each	
0.25	15	0.25	26088-1300	1 Each	
		0.25	26088-1420	1 Each	
		0.5	26088-2230	1 Each	
	30 with 5m SafeGuard	0.25	26088-1421	1 Each	
		0.25	26088-1540	1 Each	
		0.5	26088-2350	1 Each	
0.32	15	0.25	26088-1310	1 Each	
		0.5	26088-2120	1 Each	
		1.0	26088-2850	1 Each	
	30	0.25	26088-1430	1 Each	
		0.5	26088-2240	1 Each	
		1.0	26088-2970	1 Each	
		30m with 5m SafeGuard	0.25	26088-1435	1 Each
		60	0.25	26088-1550	1 Each
			0.5	26088-2360	1 Each
	0.53	15	1.0	26088-3090	1 Each
			0.5	26088-2130	1 Each
			1.0	26088-2860	1 Each
		30	0.25	26088-1440	1 Each
			0.5	26088-2250	1 Each
			1.0	26088-2980	1 Each
1.5			26088-3360	1 Each	
60			0.25	26088-1560	1 Each
			0.5	26088-2370	1 Each
		1.0	26088-3100	1 Each	

Applications:

- FAMES
- Flavor compounds and essential oils
- Solvents
- Xylene isomers
- EPA Method 603 for Acrolein/ Acrylonitrile

Similar to:

- DB-WAX
- DB-WAXetr
- HP-Wax
- HP-Innowax
- Supelcowax 10
- CP-Wax 52 CB
- Stabilwax
- Rtx-Wax
- BP20
- ZB-Wax
- Optima Wax
- AT-Wax

TraceGOLD TG-WaxMT Metal GC Columns

ID (mm)	Length (m)	Film Thickness (µm)	Cat. No.	Quantity
0.25	30	0.25	26M88-1420	1 Each
		0.5	26M88-2230	1 Each
		60	26M88-1540	1 Each
0.53	30	0.25	26M88-1440	1 Each
		0.5	26M88-2250	1 Each
		1.0	26M88-2880	1 Each
		1.5	26M88-3360	1 Each